

Tynne Downlights

Bruksområder

- Lager - Garasjer - Verksted - Kommersielle fasiliteter
- Gang Korridor (åpne og lukket) - Felthus og gymsaler

ri er estilles separat

Kan le ere f lgende typer dri ere a på dim ar - V ali
Kan serieko le flere armaturer per dri e

a la ere energifor ruk enn tils arende lamper med sparep rer
kompaktlysr r e nt lys o er hele flaten

EL-TEKNISKE SPESIFIKASJONER:

Effekt LED.....7W til 34W
Total effekt lampe7W - 34W
SpenningAC220V-240V /50Hz-60Hz
Driftstemperatur-40° til +50°

MEKANISKE SPESIFIKASJONER:

Levetid50.000 Timer - L70
Armaturhus.....Støpt aluminium
Front.....PC

LYSTEKNISKE SPESIFIKASJONER:

Lysfluks.....1500 lm
Lysutbytte.....140 lm/W
Strøm.....320-350mA
Fargegjengivelse80Ra

5
ÅRS
GARANTI

IP
65

On / Off




Varenummer: El.nummer:


440790	Aries LED 7W 3000K R095
440791	Aries LED 10W 3000K R140
440792	Aries LED 16W 3000K R200
440793	Aries LED 27W 3000K R275
440794	Aries LED 34W 3000K R330

Model	R095	R140	R170	R200	R275	R330
Hole size	Φ 80 ~ 85mm	Φ 115 ~ 125mm	Φ 145 ~ 155mm	Φ 180 ~ 185mm	Φ 250 ~ 260mm	Φ 310 ~ 315mm

2. After fixing the power driver, connect output terminal of driver with input terminal of ceiling panel light (Be cautious: main power must be shut down in this procession). Turn on main power after connection terminals, checking if the lamp light up.

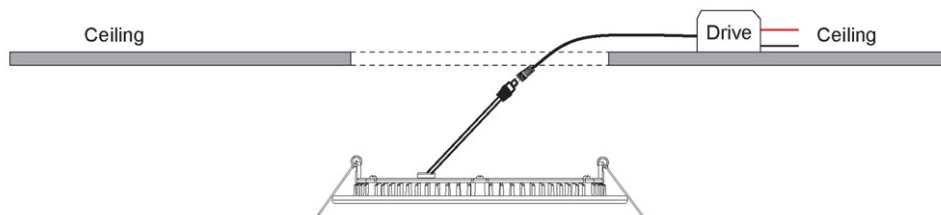

3. After confirming lighten up, cut off main power, push springs of ceiling as vertical and embedded lamp into ceiling. installation finished.

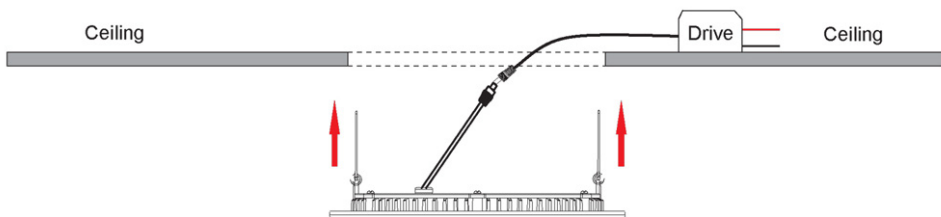

4. Installation Complete

